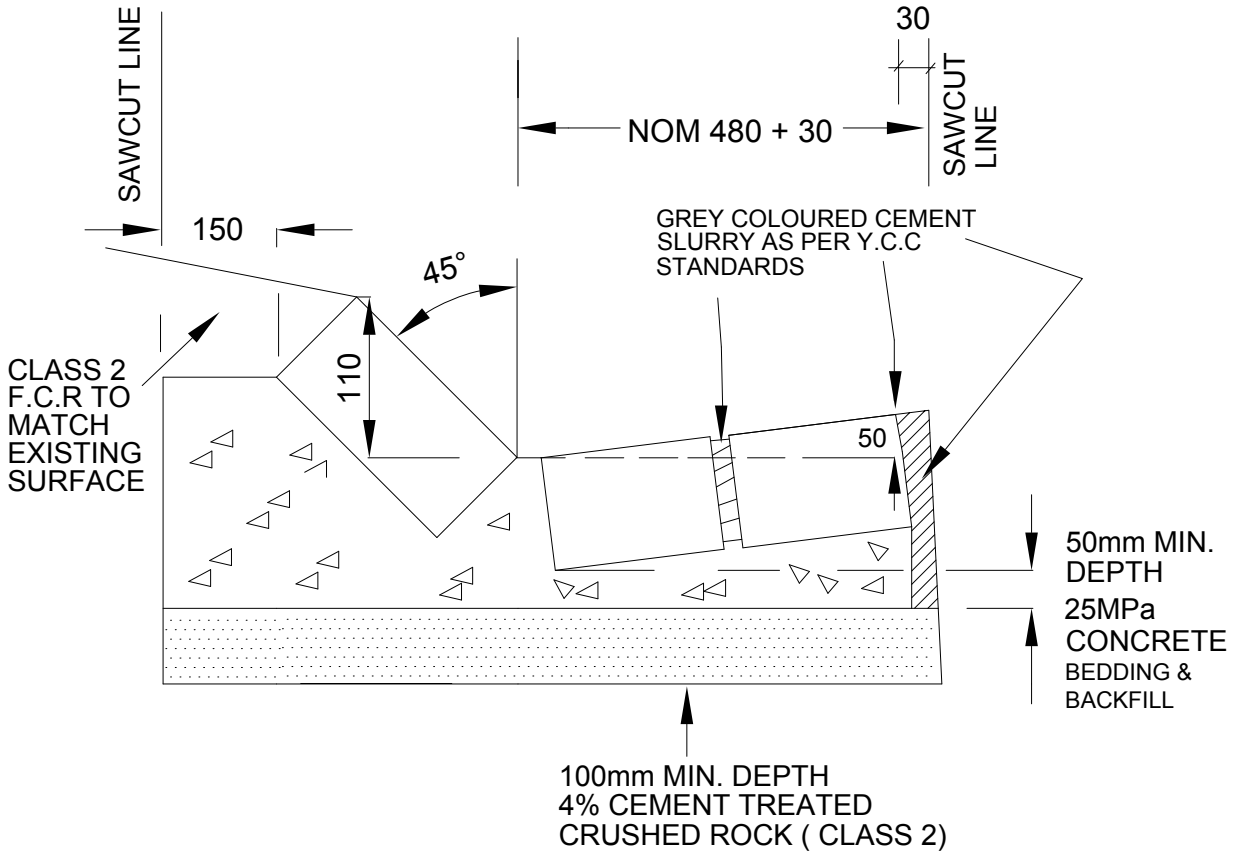

GENERAL NOTES

1. PITCHERS ARE NOMINALLY 300*225*150mm.
2. PITCHER KERB AND CHANNEL TO BE LAID IN STRETCHER BOND PATTERN.
3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH COUNCILS SPECIFICATION " CONSTRUCTION OF PITCHER KERB & CHANNEL AND PRAM CROSSINGS".
4. DAMAGED AND UNSUITABLE BLUESTONE BLOCKS (PITCHERS) TO BE REPLACED.
5. ALL BLUESTONE JOINTS TO BE NO MORE THAN 15mm WIDE.
6. ALL MORTAR JOINTS TO HAVE A BRUSH FINISH.
7. CEMENT TREATED CRUSHED ROCK BEDDING BELOW THE CHANNEL SHALL HAVE A MINIMUM COMPACTED DENSITY OF 90% OF THE MODIFIED AASHO VALUE. CEMENT TREATED CRUSHED ROCK IN FRONT OF THE CHANNEL SHALL HAVE A MINIMUM COMPACTED DENSITY OF 95% OF THE MODIFIED AASHO VALUE..
8. THE NEED FOR AN A.G PIPE TO BE DETERMINED BY CONTRACT SPECIFICATIONS OR SUPERVISING ENGINEER.
9. ALL BLUESTONE EDGING MUST HAVE A STRAIGHT ALIGHNMENT. STRING LINES MUST BE SET UP FOR APPROVAL BY THE SUPERVISING ENGINEER PRIOR TO COMMENCEMENT.

Yarra Standard: YSD30

Drawing Title:

SEMI-MOUNTABLE PITCHER KERB & TWO PITCHER CHANNEL

Scale at A4 N.T.S
Updated 27/11/07

CITY OF YaRRA

Richmond Town Hall 333 Bridge Road Richmond PO Box 168 Richmond 3121
Phone (03) 9205 5010 Fax (03) 8417 6666