


Park seat fixed to concrete slab with M10 x 75mm long Dyna bolts. Upon fixing Dyna bolts shall be spot welded to prevent removal.

Excavate existing surface 150mm below finished surface level and construct concrete slab with:

- 100mm thick 20MPa reinforced concrete slab
- 50mm of compacted crushed rock (Class 2)
- Build up with approved compacted sub soil (where necessary)

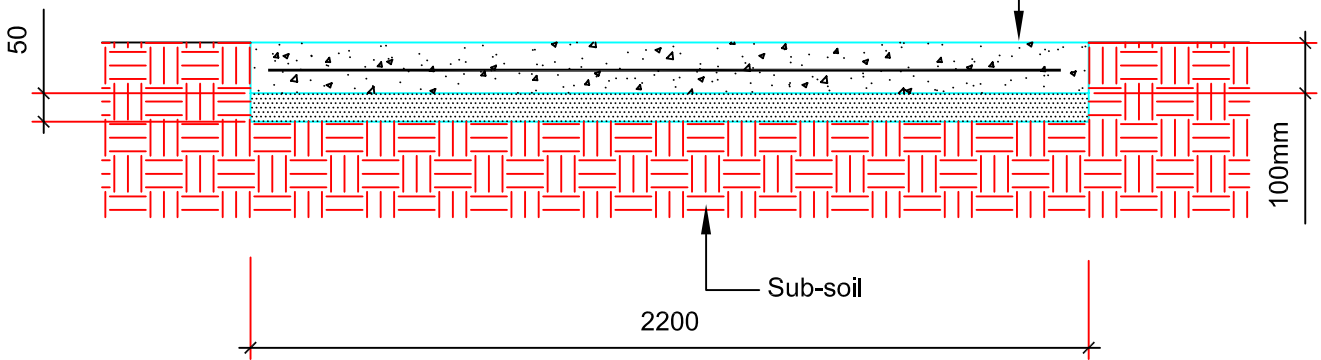

Drawing Title:
Seat Slab Detail

Dwg No. 0S. 48
Scale at A4 1: 20
Updated 06/09/02
Yarra Standard: YSD107

