


Park seat fixed to concrete slab with 12mmØ x 100mm long Dyna bolts. Tightly fix dome nut to protruding thread above fixing nut. Dome nut shall firmly butt against top of fixing nut. Ensure nuts are tamper proof.

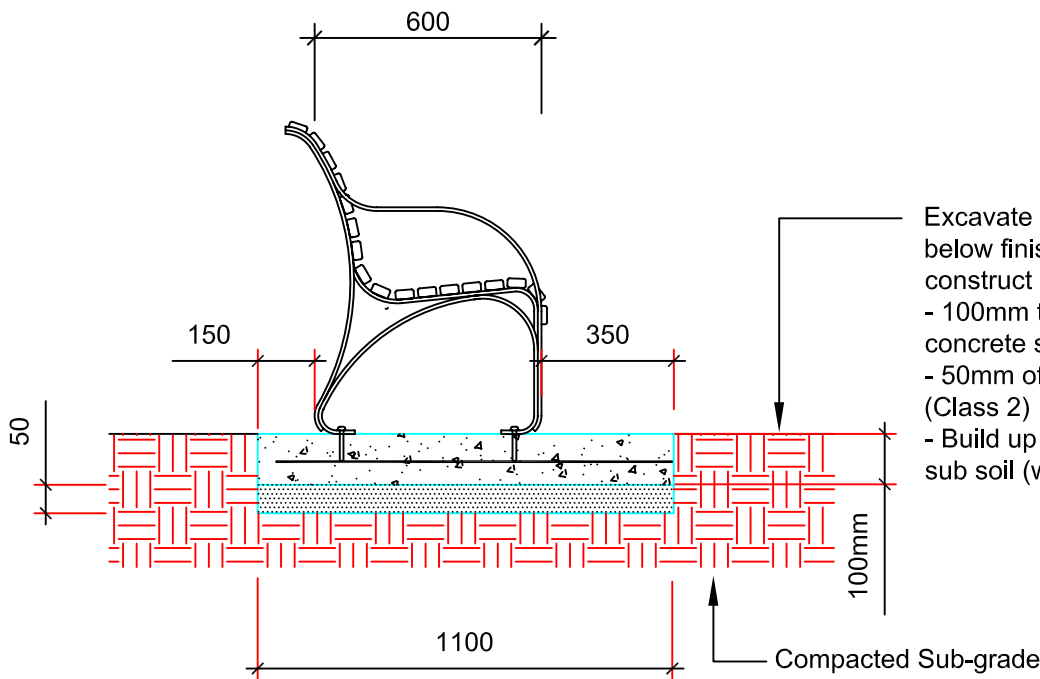

Excavate existing surface 150mm below finished surface level and construct concrete slab with:

- 100mm thick 25MPa reinforced concrete slab
- 50mm of compacted crushed rock (Class 2)
- Build up with approved compacted sub soil (where necessary)

Drawing Title:
MCC Style Park Seat

Dwg No. 0S. 22
Scale at A4 1: 20
Updated 07/10/02
Yarra Standard: YSD81

